


FLOS

05.1726.14BDA Black/Steel

Light Shadow Adjustable Trim Dali Version 12 Spots Optic Flood UPGRADE


Designed by FLOS Architectural, 2022

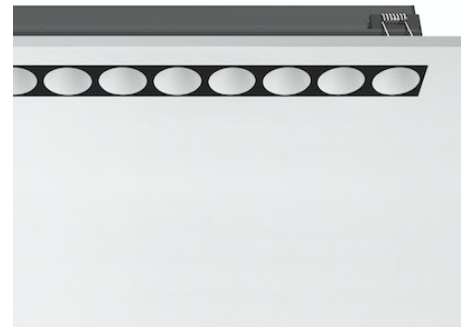

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

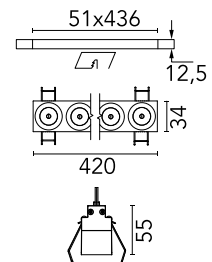

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
LED type	Power LED
Lamp category	LED
Number of heads	1
Power (W)	32.4
System flux (lm)	2577

Physical

Colour	Black/Steel
Trim	Yes
Orientation	Adjustable
Longitudinal tilting (°)	30
Recessed depth (mm)	75
Length (mm)	436
Net weight (kg)	0.66
IP internal	20

Download

[Mounting instructions](#) [↓ PDF](#)

[Mounting instructions](#) [↓ PDF](#)

Photometric Files

[LDT / IES](#) [↓ ZIP](#)


Technical Drawings

[2D](#) [↓ ZIP](#)

[3D](#) [↓ ZIP](#)



Schematic light drawing

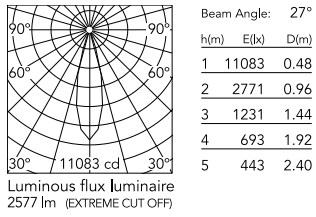

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	27
Beam angle C90-270 (°)	27


Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220
Forward voltage (V)	34.8
LED current (mA)	900
Driver	Remote included
Dimmable	Yes
Dimming type	Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)


Notes

Pre-Installation frame not required.

Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Accessories & Power Supply




REQUIRED
Frame

Installation

08.0513.00

Pre-installation No Trim Frame
12L Fix

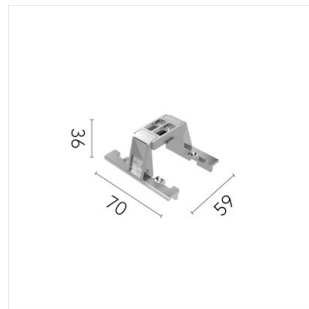

OPTIONAL
Accessory

Mounting

08.0052.90

Accessory for mounting of No
Trim Fix continuous line.