

FLOS




05.1732.14BDA Black/Bronze

Light Shadow Adjustable Trim Dali Version 12 Spots Optic Wide Flood

UPGRADE


Designed by FLOS Architectural, 2022

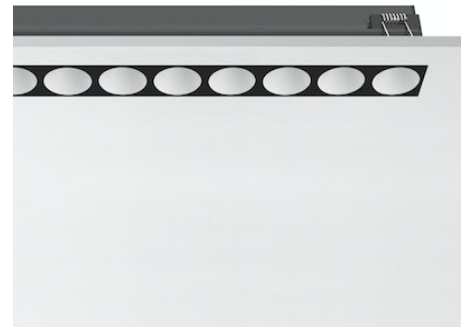

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

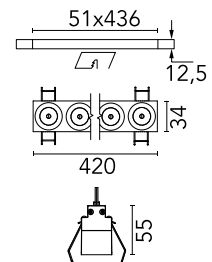

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
LED type	Power LED
Lamp category	LED
Number of heads	1
Power (W)	32.4
System flux (lm)	2301

Physical

Colour	Black/Bronze
Trim	Yes
Orientation	Adjustable
Longitudinal tilting (°)	30
Recessed depth (mm)	75
Length (mm)	436
Net weight (kg)	0.66
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)


Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



Schematic light drawing

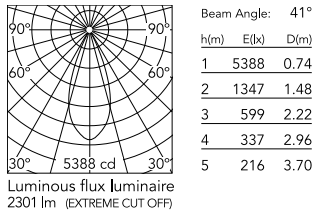

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	40
Beam angle C90-270 (°)	40

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220
Forward voltage (V)	34.8
LED current (mA)	900
Driver	Remote included
Dimmable	Yes
Dimming type	Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)

Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Notes

Pre-Installation frame not required.

Accessories & Power Supply




REQUIRED
Frame

Installation

08.0513.00

Pre-installation No Trim Frame
12L Fix

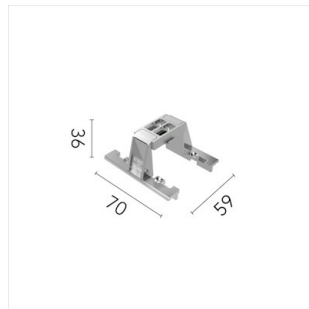

OPTIONAL
Accessory

Mounting

08.0052.90

Accessory for mounting of No
Trim Fix continuous line.